

## Column Speaker TZ-315 TZ-325 TZ-335 TZ-345



Column speaker, designed in fashion style and made of aluminium material for outdoor/indoor use, built-in 70V/100V transformer. The column speakers use with 4-inch woofer x 1/2/3/4 pieces and one 1-inch high quality horn speaker, rated power 15W, 25W, 35W and 45 Watts, use for commercial audio system or public address system (pa system) of input voltage 70/100 volt. Fast installation with strong mounting bracket. It is durable and practical and very competitive to satisfy various application of sound system.

### Features

- I 4"x1+1" (TZ-315) / 4"x2+1" speaker (TZ-325) / 4"x3+1" speaker (TZ-335) / 4"x4+1" speaker (TZ-345);
- I Rated power 15 Watts (TZ-315), 25 Watts (TZ-325), 35 Watts (TZ-335) , 45 Watts (TZ-345);
- I Input voltage 70/100 Volt;
- I Sensitivity 86dB (TZ-315) / 87dB (TZ-325) / 88dB (TZ-335) / 89dB (TZ-345);
- I Frequency Response 140~20KHz (TZ-315) / 130~19KHz (TZ-325) / 120~20KHz (TZ-335) / 100~20KHz (TZ-345)
- I Mounting speaker, strong mounting bracket;
- I Aluminium material body, Champagne color;
- I Dimension 295x151x125mm (TZ-315) / 370x151x125mm (TZ-325) / 500x151x125mm (TZ-335) / 610x151x125mm (TZ-345)

### Specification

Model No.	TZ-315	TZ-325	TZ-335	TZ-345
Rated Power	15W	25W	35W	45W
Speaker	4"wooferx1+1"tweeter	4"wooferx2+1"tweeter	4"wooferx3+1"tweeter	4"wooferx4+1"tweeter
Input Voltage	70V/100V Line			
Sensitivity	86 dB	87 dB	88 dB	89 dB
Frequency Response	140-20KHz	130-20KHz	120-20KHz	100-20KHz
Mounting Method	Mounting bracket			
Color	Champagne			
Dimension	295x151x125mm	370x151x125mm	500x151x125mm	610x151x125mm
Weight	1.9 kg	2.8 kg	4 kg	5.2 kg

## Column Speaker TZ-415 TZ-425 TZ-435 TZ-445



Column speaker, designed in fashion style and made of aluminium material for outdoor/indoor use, built-in 70V/100V transformer. The column speakers use with 4-inch woofer x 1/2/3/4 pieces and one 1-inch tweeter speaker, rated power 15W, 25W, 35W and 45 Watts, use for commercial audio system or public address system (pa system) of input voltage 70/100 volt. Fast installation with strong mounting bracket. It is durable and practical and very competitive to satisfy various application of sound system.

### Features

- I 4"x1+1" (TZ-415) / 4"x2+1" speaker (TZ-425) / 4"x3+1" speaker (TZ-435) / 4"x4+1" speaker (TZ-445);
- I Rated power 15 Watts (TZ-415), 25 Watts (TZ-425), 35 Watts (TZ-435) , 45 Watts (TZ-445);
- I Input voltage 70/100 Volt;
- I Sensitivity 85dB (TZ-415) / 86dB (TZ-425) / 87dB (TZ-435) / 88dB (TZ-445);
- I Frequency Response 140~18KHz (TZ-415) / 130~18KHz (TZ-425) / 120~18KHz (TZ-435) / 100~18KHz (TZ-445)
- I Mounting speaker, strong mounting bracket;
- I Aluminium material body, grey color;
- I Dimension 295x151x125mm (TZ-415) / 370x151x125mm (TZ-425) / 500x151x125mm (TZ-435) / 610x151x125mm (TZ-445)

### Specification

Model No.	TZ-415	TZ-425	TZ-435	TZ-445
Rated Power	15W	25W	35W	45W
Speaker	4"wooferx1+1"tweeter	4"wooferx2+1"tweeter	4"wooferx3+1"tweeter	4"wooferx4+1"tweeter
Input Voltage	70V/100V Line			
Sensitivity	86 dB	87 dB	88 dB	89 dB
Frequency Response	140-20KHz	130-20KHz	120-20KHz	100-20KHz
Mounting Method	Mounting bracket			
Color	Grey			
Dimension	295x151x125mm	370x151x125mm	500x151x125mm	610x151x125mm
Weight	1.8 kg	2.6 kg	3.8 kg	5 kg

## Column Speaker TZ-515 TZ-525 TZ-535 TZ-545



Column speaker, designed in fashion style and made of aluminium material for outdoor/indoor use, built-in 70V/100V transformer. The column speakers use with 4-inch woofer x 1/2/3/4 pieces and one 1-inch tweeter speaker, rated power 15W, 25W, 35W and 45 Watts, use for commercial audio system or public address system (pa system) of input voltage 70/100 volt. Fast installation with strong mounting bracket. It is durable and practical and very competitive to satisfy various application of sound system.

### Features

- I 4"x1+1" (TZ-515) / 4"x2+1" speaker (TZ-525) / 4"x3+1" speaker (TZ-535) / 4"x4+1" speaker (TZ-545);
- I Rated power 15 Watts (TZ-515), 25 Watts (TZ-525), 35 Watts (TZ-535) , 45 Watts (TZ-545);
- I Input voltage 70/100 Volt;
- I Sensitivity 85dB (TZ-515) / 86dB (TZ-525) / 87dB (TZ-535) / 88dB (TZ-545);
- I Frequency Response 140~18KHz (TZ-515) / 130~18KHz (TZ-525) / 120~18KHz (TZ-535) / 100~18KHz (TZ-545)
- I Mounting speaker, strong mounting bracket;
- I Aluminium material body, white color;
- I Dimension 305x152x100mm (TZ-515) / 380x152x100mm (TZ-525) / 505x152x100mm (TZ-535) / 620x152x100mm (TZ-545)

### Specification

Model No.	TZ-515	TZ-525	TZ-535	TZ-545
Rated Power	15W	25W	35W	45W
Speaker	4"wooferx1+1"tweeter	4"wooferx2+1"tweeter	4"wooferx3+1"tweeter	4"wooferx4+1"tweeter
Input Voltage	70V/100V Line			
Sensitivity	86 dB	87 dB	88 dB	89 dB
Frequency Response	140-20KHz	130-20KHz	120-20KHz	100-20KHz
Mounting Method	Mounting bracket			
Color	White			
Dimension	305x152x100mm	380x152x100mm	505x152x100mm	620x152x100mm
Weight	1.6 kg	2.5 kg	3.4 kg	4.2 kg

## Column Speaker TZ-606 TZ-608 TZ-610 TZ-612



Waterproof column speaker, designed in fashion style and made of aluminium material for outdoor/indoor use, built-in 70V/100V transformer. The column speakers use with 6.5" woofer x 3/3/4/4 pieces and one horn speaker, rated power 60W, 80W, 100W and 120 Watts, use for commercial audio system or public address system (pa system) of input voltage 70/100 volt. Fast installation with strong mounting bracket. It is durable and practical and very competitive to satisfy various application of sound system.

### Features

- I 6.5"x3+1" horn(TZ-606) / 6.5"x3+1" horn (TZ-608) / 6.5"x4+1" horn (TZ-610) / 6.5"x4+1" horn (TZ-612);
- I Rated power 60 Watts (TZ-606), 80 Watts (TZ-608), 100 Watts (TZ-610) , 120 Watts (TZ-612);
- I Input voltage 70/100 Volt;
- I Sensitivity 88dB (TZ-606) / 89dB (TZ-608) / 90dB (TZ-610) / 91dB (TZ-612);
- I Frequency Response 140~20KHz (TZ-606) / 130~20KHz (TZ-608) / 120~20KHz (TZ-610) / 100~20KHz (TZ-612)
- I Mounting speaker, strong mounting bracket;
- I Aluminium material body, white color;
- I Dimension 710x227x125mm (TZ-606) / 910x227x125mm (TZ-608) / 1110x227x125mm (TZ-610) / 1310x227x125mm (TZ-612)

### Specification

Model No.	TZ-606	TZ-608	TZ-610	TZ-612
Rated Power	60W	80W	100W	120W
Speaker	6.5"wooferx1+1"horn	4"wooferx2+1"tweeter	4"wooferx3+1"tweeter	4"wooferx4+1"tweeter
Input Voltage	70V/100V Line			
Sensitivity	88 dB	89 dB	90 dB	91 dB
Frequency Response	140-20KHz	130-20KHz	120-20KHz	100-20KHz
Mounting Method	Mounting bracket			
Color	White			
Dimension	710x227x125mm	910x227x125mm	1110x227x125mm	1310x227x125mm
Weight	6.8 kg	9.5 kg	11.8 kg	14 kg



## Slim Column Speaker

TZ-720 / TZ-740 / TZ-760 / TZ-780

**ARTONE** Commercial Audio System



## Features

Ultra slim design column speaker;

Total 4-16 speaker drivers deliver comfortable vocal and music sound;

Reliable performance for 70V/100V line commercial audio;

Versatile and practical in installation and for architech sound;

Extruded aluminium with white protective finish;

20-80W various power selection;

Best for auditorium, square, bus/railway station, church, meeting room, halls, etc;



← Installation Bracket ( $\pm 90^\circ$  adjustable)

## Specification

Model No.	TZ-720	TZ-740	TZ-760	TZ-780
Rated Power	20W	40W	60W	80W
Line Voltage	70V / 100V			
Sensitivity (1m/1w)	86 $\pm$ 3dB	87 $\pm$ 3dB	88 $\pm$ 3dB	89 $\pm$ 3dB
Frequency Response	240~15KHz	235~15.5KHz	230~16KHz	225~16.5KHz
Material & Finish	Aluminum			
Speaker Units	2" speaker x 4	2" speaker x 8	2" speaker x 12	2" speaker x 16
Dimension (mm)	400 x 79 x 71	616 x 79 x 71	832 x 79 x 71	1048 x 79 x 71
Weight (kg)	1.9	2.8	3.6	4.5



# Slim Column Speaker

## TZ-816

**ARTONE Commercial Audio System**



## Features

Ultra slim design column speaker;

Total 20 speaker drivers deliver excellent sound, ideal for speech or music reproduction;

Reliable performance for 100V line commercial audio;


Versatile and practical in installation and for architect sound;

Extruded aluminium with white protective finish;

150W rated power and 250W max power at 100V output;

Best for public square, airport, bus/railway station, cathedrals, playground, halls, etc;

## Installation Illustration

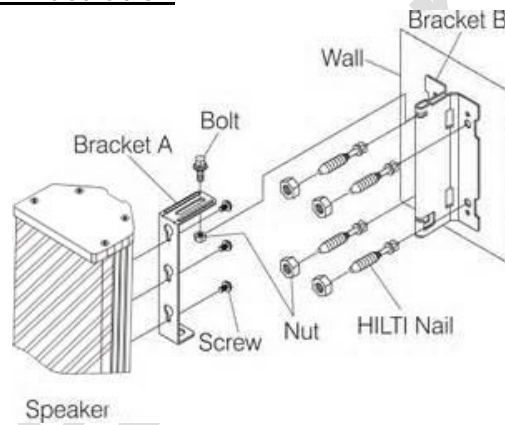

## Specification

Model No.	TZ-816
Rated Power	150W
Max Power	250W
Line Voltage	100V
Sensitivity (1m/1w)	92±3dB
Frequency Response	350~12KHz
Material & Finish	Aluminum
Speaker Units	3" full range speaker x 16 + 1" tweeter x 4
Dimension	2000 x 104 x 86 mm
Weight	10.8KG



## Column Speaker TZ-906 TZ-912 TZ-918 TZ-924



Waterproof column speaker, designed in fashion style and made of aluminium material for outdoor/indoor use, built-in 70V/100V transformer. The column speakers use with 6.5" woofer x 1/2/3/4 pieces and one horn speaker, rated power 60W, 80W, 100W and 120 Watts, use for commercial audio system or public address system (pa system) of input voltage 70/100 volt. Fast installation with strong mounting bracket. It is durable and practical and very competitive to satisfy various application of sound system.

### Features

- I 6.5"x1+1" horn(TZ-906) / 6.5"x2+1" horn (TZ-912) / 6.5"x3+1" horn (TZ-918) / 6.5"x4+1" horn (TZ-924);
- I Rated power 60 Watts (TZ-906), 120 Watts (TZ-912), 180 Watts (TZ-918) , 240 Watts (TZ-924);
- I Input voltage 70/100 Volt;
- I Sensitivity 88dB (TZ-906) / 89dB (TZ-912) / 90dB (TZ-918) / 91dB (TZ-924);
- I Frequency Response 140~20KHz (TZ-906) / 130~20KHz (TZ-912) / 120~20KHz (TZ-918) / 100~20KHz (TZ-924)
- I Mounting speaker, strong mounting bracket;
- I Aluminium material body, white color;
- I Dimension 430x250x230mm (TZ-906) / 665x250x230mm (TZ-912) / 905x250x230mm (TZ-918) / 1305x250x230mm (TZ-924)

### Specification

Model No.	TZ-906	TZ-912	TZ-918	TZ-924
Rated Power	60W	120W	180W	240W
Speaker	6.5"wooferx1+1"horn	6.5"wooferx2+1"horn	6.5"wooferx3+1"horn	6.5"wooferx4+1"horn
Input Voltage	70V/100V Line			
Sensitivity	88 dB	89 dB	90 dB	91 dB
Frequency Response	140-20KHz	130-20KHz	120-20KHz	100-20KHz
Mounting Method	Mounting bracket			
Color	White			
Dimension	430x250x230mm	665x250x230mm	905x250x230mm	1305x250x230mm
Weight	8.8 kg	11.2 kg	14 kg	16.1 kg